
Desk/5000

Speeding up checkout at the counter





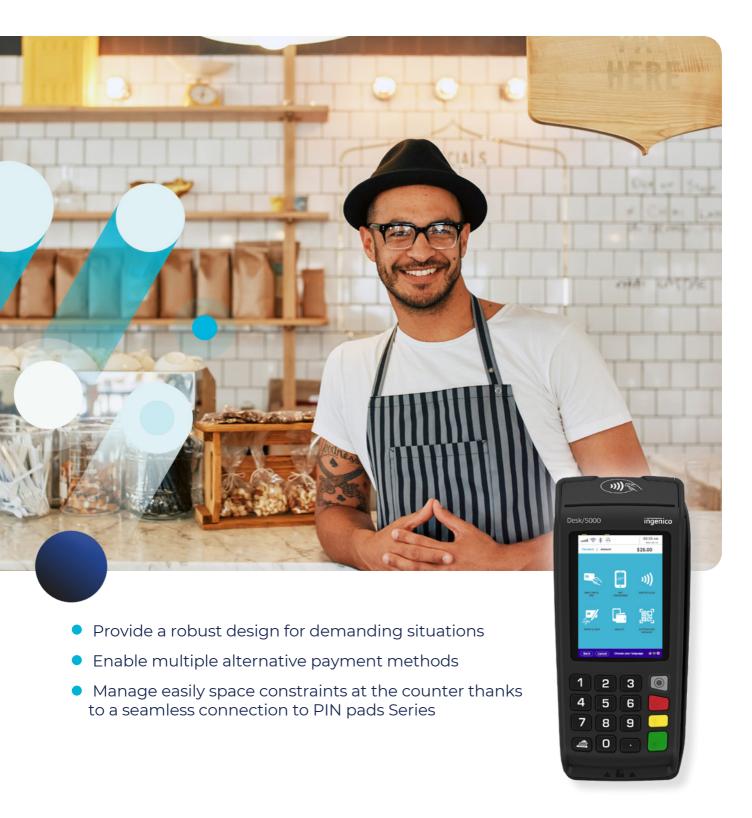

With the ability to connect to other POS devices - including the Desk/1600 PIN pads for richer customer interactions - Desk/5000 is focused on payment in all forms.



Optimized checkout time:Payments anywhere and anytime

- Multiple alternative payment methods supported
- Intuitive user interface and card readers

Robust design for demanding environment:

- Responsive keypad improves PIN entry
- Advanced outer casing

Highest security:

- Compliant with the latest global and local PCI regulations
- Optional PCI compliant privacy shield
- Kensington lock for safety

Speeding up check-out with Desk/1600

Saving space on the worktop and speeding up checkout

Maximized network availability:

- 4G, 3G, GPRS, Bluetooth, WiFi
- Ethernet

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services





Processor	Application & Crypto processor	· Cortex A5	•
Memor y	· Internal · External	S12 MB Flash, 512 MB RAM MicroSD up to 32GB	Option
os		· Telium TETRA	▽
SIM		· 2SIM	Option
SAM		· 2SAM · 3SAM	Option
Card readers	Magstripe Smart card Contactless	ISO 1/2/3, 500K lifespan EMV Level 1, 500K lifespan EMV Contactless L1 3.0 spec compliant	✓✓✓
Display	· Colour	· 3.5" backlit, HVGA (480x320) pixels	✓
Touchscreen	Resistive Capacitive		Option
Keypad		· 16 hardtop keys, raised marking, backlit	✓
Audio	· Buzzer · Speaker · Audio Jack	• Mono • Stereo	Optio n Optio
Video	· Video accelerator	- H264 codec	n •
Thermal printer	· Speed in I/s · Paper roll cage	∙ 20 l/s • 58 mm width x Ø 40 mm	

Terminal connectivity	• Wireless	4G and/or 3G with fallback • Bluetooth Class 2 Wi-Fi Dial-up MODEM Ethernet 10/100 base T	Optio n Optio n Optio n
Terminal connections	• USB • Power Supply	•1USB Host •1USB Slave • Dedicated power Jack •1RS232 •2nd RS232	y y y Option
Power supply		∙16 W or 32 W	▽
Terminal size		- 187x82x68 mm (7.3x2.6x3.2x2.6")	<u> </u>
Weight		· 340 g (12 oz)	▽
Environment	Operating Temperature Storage Temperature Operating Humidity	.0°C to +40°C (32°F to 104°F) 20°C to +55°C (-4°F to 131°F) -85% non-condensing at +40°C (104°F)	
Accessory	Magic Box Privacy shield Stylus Kit	NxRS + 1xPower+1xEth.+1xLine In - 2xRS + 1xPower+1xEth.+1xLine In - Factory mounted - Field upgradable	Optio n Optio n Optio
Security		• PCI PTS 6.x & 5.x online & offline certified	Optio n



